

N-TOPCon series

182 N-TOPCon Bifacial Module

580W ~ 600W




12 years product
workmanship warranty



30 years linear power output
warranty



1% 1st-year degradation
0.40% annual degradation

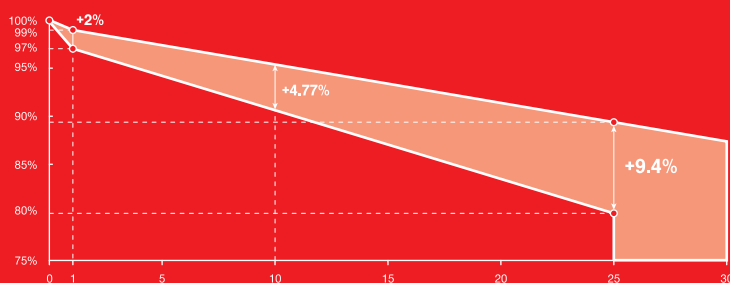

Conventional LESSO Solar Module

FEATURES AND BENEFITS



N-TOPCon brings 10-30% additional power generation comparing with conventional P-type module.



N-TOPCon solar cell has no LID naturally which can increase power generation.



Higher bifaciality, higher power output and lower BOS cost.



Double sides power output to reach higher comprehensive efficiency and get more profit.



Higher power output even under low-light environments like on cloudy or foggy days.



Higher power generation under working conditions, thanks to passivating contact cell technology.



More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area.

LESSO 182 N-TOPCon Bifacial Module



Power Range
580W ~ 600W



Power Output Tolerance
0W ~ +5W




Maximum Efficiency
23.23%

(Unit: mm)

Structure Performance

Solar Cell Type	183.75R N-TOPCon Mono Cell (Half Cell)
Solar Cell Arrangement	144pcs(6×24)
Module Dimension	2278×1134×35mm/30mm
Weight	32.3kg(35mm) / 31.2kg(30mm)
Front Glass	2.0mm, highly transparent semi tempered glass with anti-reflective coating
Frame	Anodized Aluminum Alloy
Junction Box	IP68 rated
Cable	4mm ² , portrait ^{400mm (+)} / _{200mm (-)} , landscape ^{1400mm (+)} / _{1400mm (-)} Length can be customized
Diode Quantity	3 pcs
Front side / Rear side	5400pa / 2400pa
Connector	PV-01 (Guangdong Lesso Electric Co., Ltd.)
Per Pallet	31pcs(35mm) / 36pcs(30mm)
Per Container(40'HQ)	620pcs(35mm) / 720pcs(30mm)
Fire Rating	Class A

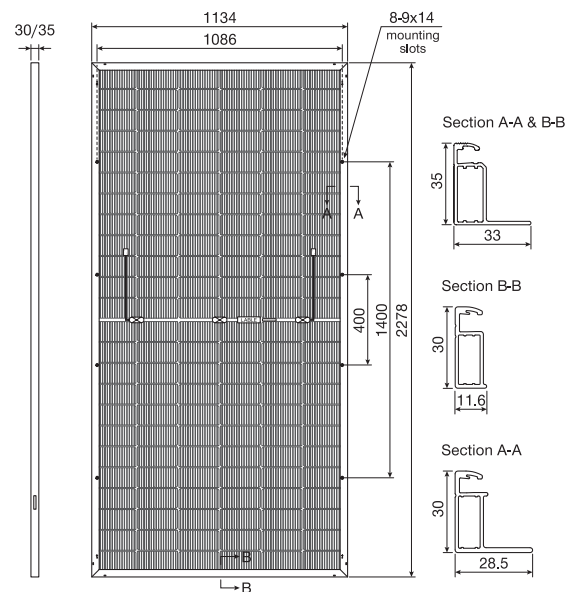

Electrical Performance Parameters | STC

Model Type		580C(HBD) 72(182)	585C(HBD) 72(182)	590C(HBD) 72(182)	595C(HBD) 72(182)	600C(HBD) 72(182)
Nominal Max. Power	P _{max} (W)	580	585	590	595	600
Max. Power Voltage	V _{MP} (V)	42.75	42.89	43.04	43.18	43.33
Max. Power Current	I _{MP} (A)	13.57	13.64	13.71	13.78	13.85
Open Circuit Voltage	V _{OC} (V)	51.43	51.63	51.83	52.03	52.23
Short Circuit Current	I _{SC} (A)	14.33	14.39	14.45	14.51	14.57
Module Efficiency	(%)	22.45	22.65	22.84	23.03	23.23
Power Output Tolerance	(W)	0 ~ +5W				


* STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.
* Power measurement tolerance ±3%.

Bifacial Nameplate Irradiance | BNPI

Model Type		580C(HBD) 72(182)	585C(HBD) 72(182)	590C(HBD) 72(182)	595C(HBD) 72(182)	600C(HBD) 72(182)
Nominal Max. Power	P _{max} (W)	639	645	650	655	660
Max. Power Voltage	V _{MP} (V)	42.84	42.98	43.11	43.25	43.39
Max. Power Current	I _{MP} (A)	14.94	15.02	15.08	15.15	15.22
Open Circuit Voltage	V _{OC} (V)	51.42	51.62	51.82	52.02	52.22
Short Circuit Current	I _{SC} (A)	15.82	15.89	15.95	16.02	16.09
BIFI		0.437	0.444	0.444	0.444	0.444

* BIFI: rear irradiance driven power gain yield.
* BNPI: Irradiance Front side 100W/m² Rear side 135W/m², Ambient Temperature 25°C, Air Mass AM1.5.
* Power measurement tolerance ±3%.

Current-Voltage & Power-Voltage Curve (595C)

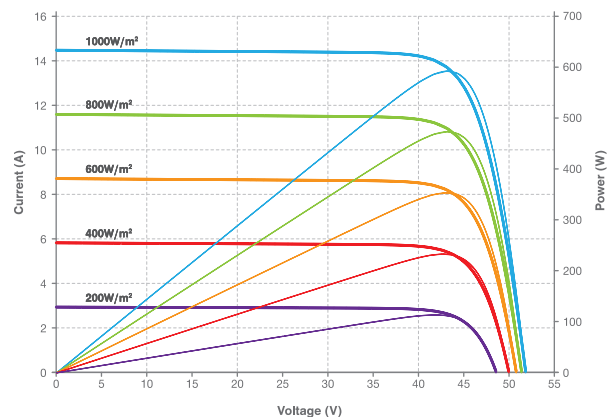

Bifaciality Coefficient

Tolerance/ϕIsc	77.71±4%
Tolerance/ϕVoc	99.00±3%
Tolerance/ϕPmax	77.32±5%

Short Circuit Current at BSI

Tolerance/Isc [Adc]	17.62±4%
---------------------	----------

Temperature Characteristics

Nominal Module Operating Temperature	44±2°C
Temperature Coefficient (Isc)	+0.043%
Temperature Coefficient (Voc)	-0.25%
Temperature Coefficient (Pmax)	-0.30%

Maximum Parameters

Working Temperature	-40~+85°C
Maximum System Voltage	1500V DC
Nominal Maximum Fuse Current	30A

Guangdong Lesso Banhao New Energy Technology Group Co., Ltd.

The 1st and 2nd floors of the workshop in Zone 2, No. 58, Longzhou West Road, Longjiang Town, Shunde District, Foshan City, 528318 Guangdong, P.R.China

info@lessosolar.com



Data contained in these specifications is subject to change without notice.